


Aqua Control: Fusion Series


INSTALLING TWISTER MODULE

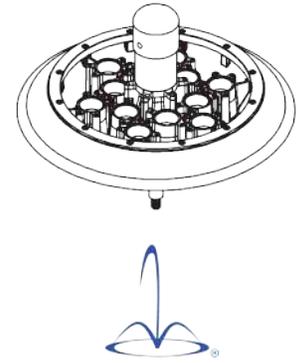



WARNING: WARRANTY VOID IF SEALS ARE REMOVED OR TWISTED MODULE IS DISASSEMBLED

**When using the twister in conjunction with the nozzles, this will affect the height of the overall spray pattern by up to 10%*

1. REMOVE THE NOZZLE BASE AND INSTALL THE LABYRINTH SEAL:

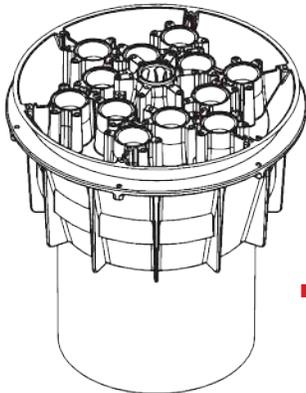

Remove the Nozzle Base by unscrewing the Center Bolt

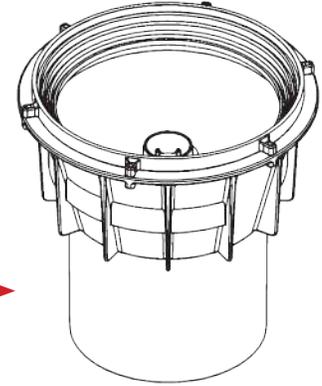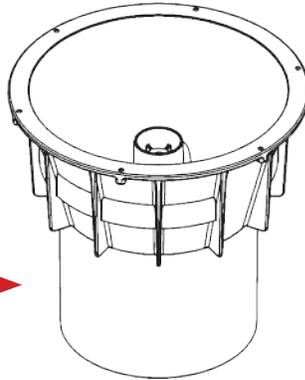


Place the Labyrinth Seal and secure using (6) Screws


Do Not add the Labyrinth Seal for Lily, Super Lily and Double Arch Lily patterns

2. ADD THREADED ROD AND SECURE:

Thread the rod into the threaded insert so that the top of the rod is 7.25" above the lip of the Cup. Secure with the nut by tightening it against the face of the insert

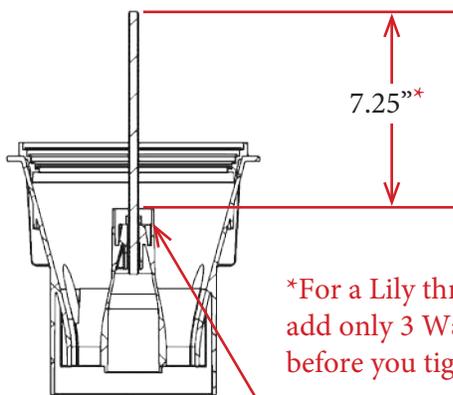

Tighten Nut to Secure

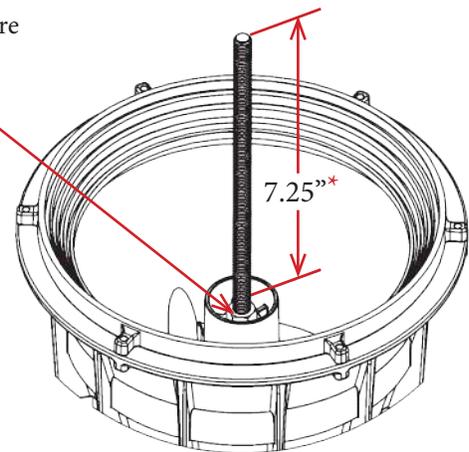

**For a Lily thread the rod to 7" and add only 3 Washers total to the Cup before you tighten the nut down.*


**For a Super Lily or Double Arch Lily thread the rod to 7" and add only 4 Washers total to the Cup before you tighten the nut down.*



Aqua Control: Fusion Series

INSTALLING TWISTER MODULE CONTINUED

3. ATTACH THE TWISTER MODULE TO THE NOZZLE BASE:

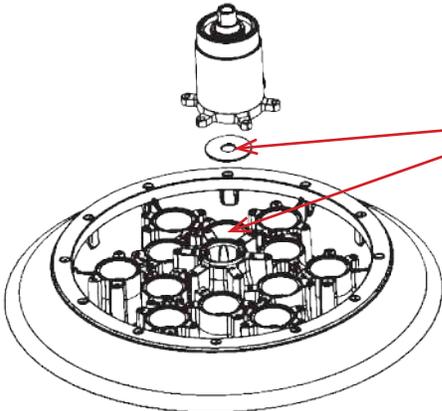


Remove the Cap first from the module

Place the provided Washer in-between the Nozzle Plate and Twister Module. Secure the Twister Module to the base using (6) provided Screws

Do Not Overtighten the Screws

Note: If converting from a Standard pattern your unit will already have nozzles installed which are not shown here

4. SPIN MODULE AND BASE ONTO THE THREADED ROD:

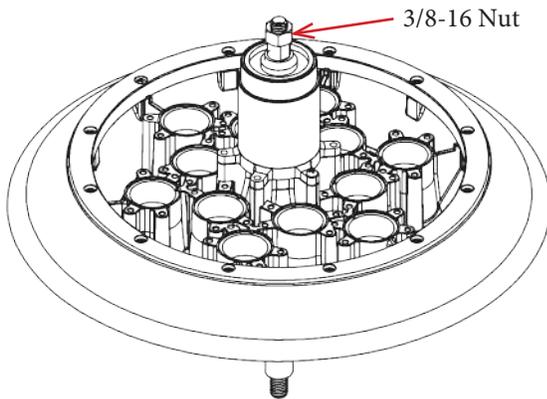


Spin the Module and Base down the Threaded Rod until it just begins to make contact with the Labyrinth Seal, then spin the base 1 revolution in reverse to raise it back up, creating a gap

For the Lily, Super Lily, or Double Arch Lily pattern spin the base until contact is made with the nut that is in the cup below, then spin the base 1 revolution in reverse to raise it back up, creating a gap

Screw the nut into the top of the rod and twist together with the metal shaft to tighten in place

The Nozzle Base should now spin freely, but should not raise or lower the whole assembly when spun

5. ADD THE CAP AND FINISH NOZZLE BUILD:

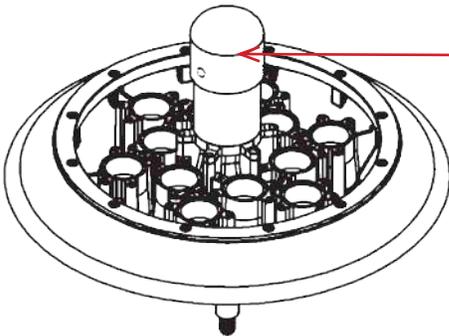

Place the cap over the Twister Module and secure through the pre-drilled hole with the screw provided.

For instructions on how to build specific Twister patterns please see the respective build page for that pattern